





Auto-excluding valves

These valves made of nickel plated brass, although they have the same properties as feeler valves, do not have the shaft that opens the air passage. They are designed to be attached to suction cups, and they close automatically when the grip on the object is lost, thus avoiding vacuum losses in the plant.

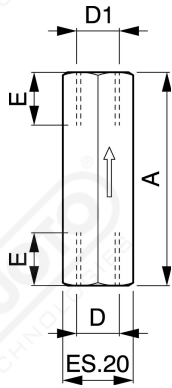


Art. VA 20

| Art. | A | B | C | DØ | D1Ø | E |
|--------------|----|---|---|------|------|----|
| VA 20 | 59 | - | - | 1/4" | 1/4" | 14 |

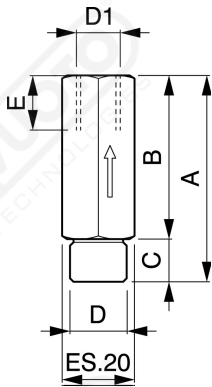

Art. VA 30

| Art. | A | B | C | DØ | D1Ø | E |
|--------------|----|----|----|------|------|----|
| VA 30 | 59 | 47 | 12 | 3/8" | 1/4" | 14 |

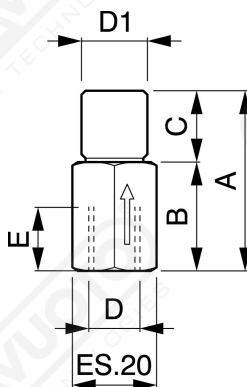

| Art. | A | B | C | DØ | D1Ø | E |
|--------------|------|------|----|------|------|-----|
| VA 50 | 39.5 | 26.5 | 13 | 1/4" | 1/4" | 8.5 |

Valves

Art. VA 50