


Standard suction-cup holders with fixing screw



A very strong nickel plated brass tubular element, with a rapid joint for attachment to a suction tube, together with a threaded sleeve with two nuts for attachment to the unit, and one or two springs to dampen the contact and exert a continuous pressure on the object to which the suction cup is attached.

- Rapid straight and "L" shaped joint
- Plastic tube diameter 6 x 8
- "L" shaped rapid joint = art. PS.....L

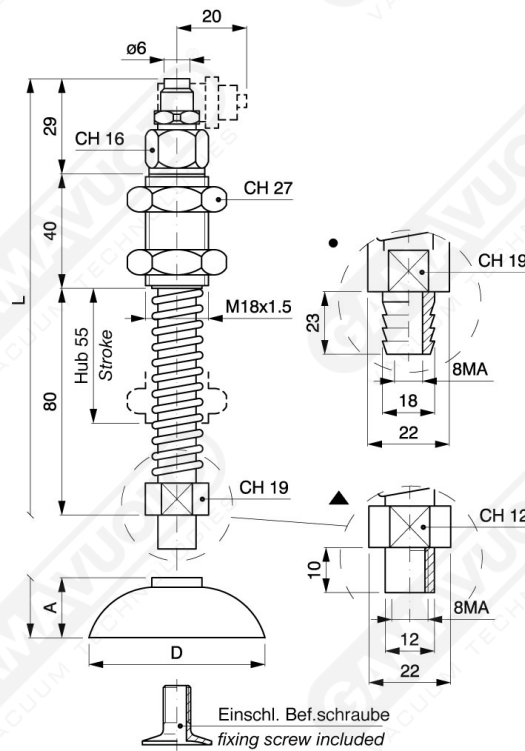

Art.

| Art. | A | D | L c 15 | L c 25 | L c 55 | L c 80 | Lc120 | Fixing screw |
|---------|----|----|--------|--------|--------|--------|-------|--------------|
| PS 25/C | 8 | 25 | 117 | 127 | 157 | 188 | 229 | SUM 9 |
| PS 30/C | 8 | 30 | 117 | 127 | 157 | 188 | 229 | SUM 9 |
| PS 35/C | 10 | 35 | 119 | 129 | 159 | 190 | 231 | SUM 8 |
| PS 35/L | 17 | 35 | 126 | 136 | 166 | 197 | 238 | SUM 8 |
| PS 45/C | 17 | 45 | 126 | 136 | 166 | 197 | 238 | SUM 14 |
| PS 45/L | 20 | 45 | 129 | 139 | 169 | 200 | 241 | SUM 14 |
| PS 60 | 22 | 59 | 131 | 141 | 171 | 202 | 243 | SUM 21 |
| PS 65 | 24 | 65 | 133 | 143 | 173 | 204 | 245 | SUM 21 |
| PS87 | 40 | 87 | 149 | 159 | 189 | 220 | - | SUM 21 |

Standard suction-cup holders

NB: the suction cups are supplied on request, specifying the material