



## Vacuum pumps without lubrication G series - 30-35 mc/h

### Characteristics


Gamavuoto 30 to 35 m<sup>3</sup>/h oil-less pumps do not require lubrication thanks to the use of vanes and covers in special graphite and it strongly reduce maintenance operations since no topping up is required.

In the "G" series the electric motor is connected to the body of the pump through a flexible connector and this allows the use of different kinds of motors.

### Installation

Connect up the vacuum circuit. Set up the electrical connections to the motor and check that the pump is rotating in the right direction.

**WARNING!** If the electrical motor rotates in the wrong direction, the suction unit could be damaged.

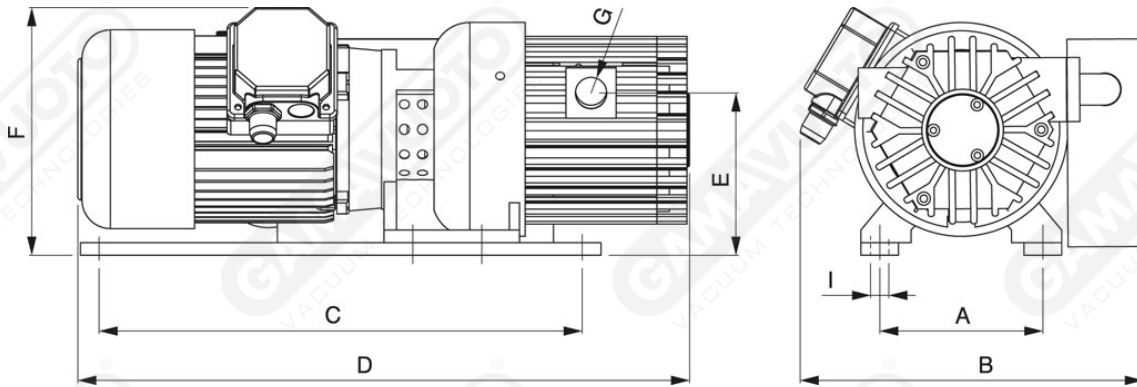

**Art. GPOS 30/35 G**

Art.	Vacuum flow		Final pressure ABS mbar (ass.)	Rpm		Motor power		Weight kg	A	B	C	D	F	G	I
	50 Hz Mc/h	60 Hz Mc/h		50 Hz g/min	60 Hz g/min	50 Hz Kw	60 Hz Kw								
<b>GPOS 30/G</b>	30	36	90	1450	1700	0.75	0.9	35	130	265	385	490	170	3/4"	8.5
<b>GPOS 35/G</b>	35	42	90	1450	1700	1.10	1.3	37	130	265	385	510	170	3/4"	8.5